


“PH-EM” 6 PANEL SERIES NARROW EMBOSSED DOOR

Polystyrene



- Polystyrene core
- “Hemmed” edge standard (skins mechanically interlocked with exposed seam)
- Optional Butt edge (PB-EM)
 - Hairline exposed seam centered in door edge channels
 - Tack welded and filled seams
- Both vertical edges beveled standard (optional square edge on one or both edges)
- 14 ga. Top and Bottom inverted channels standard (optional flush channels on one or both ends)
- 1-3/4” door thickness standard (optional 1-3/8” thickness)
- 18 ga. 6-Panel (“Colonial” style) skins standard
- Maximum size available is 3’-0” x 7’-0”
- A60 Galvanealed
- Painted with rust inhibiting primer
- Standard reinforcements for hardware: 7 ga. hinge pads, 10 ga. lock tabs (with appropriate reinforced boxes) and 12 ga. closure reinforcements
- Minimum width available is 2’6” (4-1/2” stiles)
- Maximum size available is 2’-8” x 7’-0”
- Maximum UL rating: 1-1/2 Hour for 2’-8” x 7’-0”
- Optional “PB-EM” series not available with UL rating

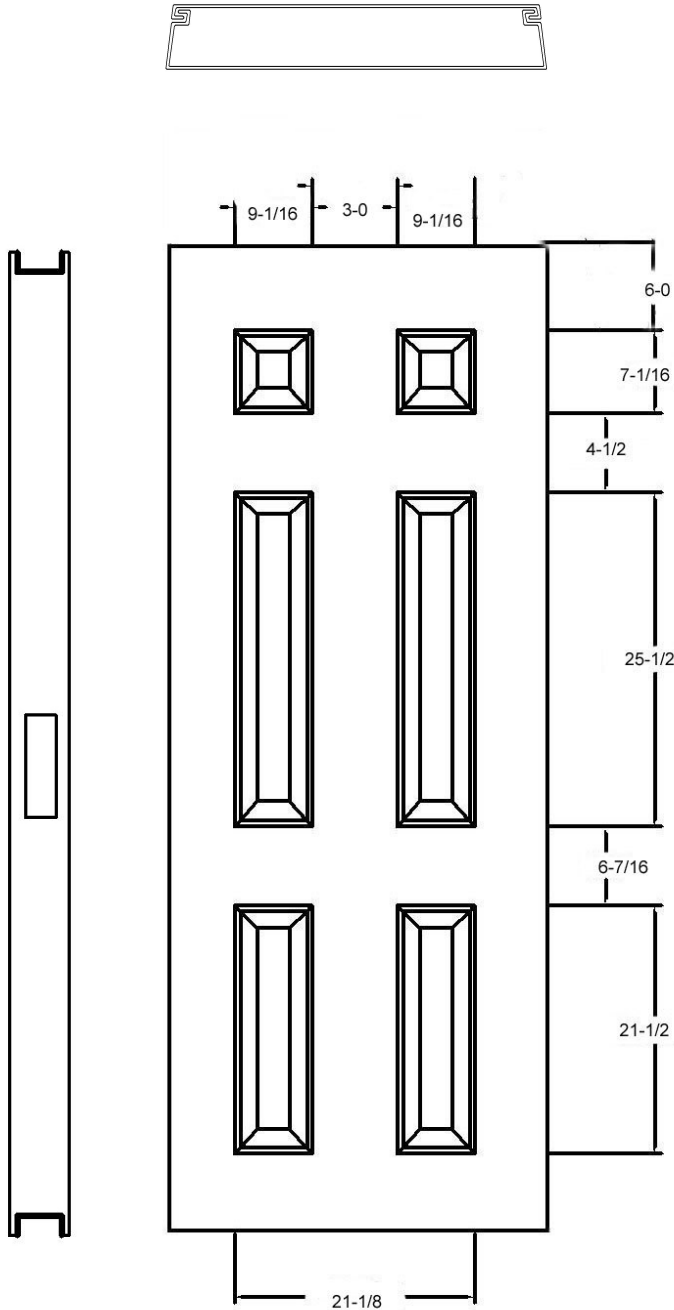

150 Division Drive
Wilmington, NC 28401
www.CustomMetalProductsNC.com
Revised 061407

Phone: 866-893-3338
Fax: 866-963-1355
Info@CustomMetalProducts.biz