




THREE SIDED FIRE DOOR FRAMES

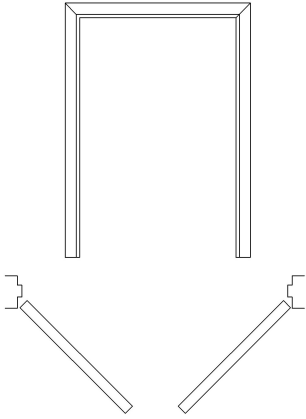


Pair of Doors
(No Mullion)

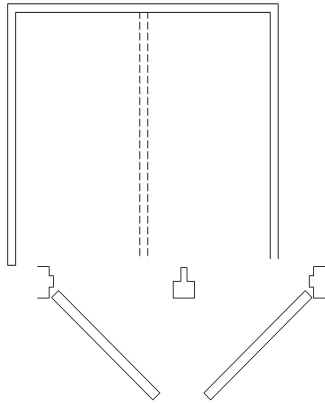


Pair of Doors
Welded or Removable
Mullion Behind Doors

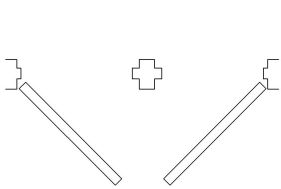


2 Singles
Welded or Removable
Mullion Between Doors




2 Singles
Welded or Removable Contra-
Swing Mullion Between Doors




Jamb or Head



Welded or Removable
Mullion Between Doors



Welded or Removable
Contra-Swing Mullion



Welded or Removable
Mullion Behind Doors

PRODUCT

3 Hour (maximum) fire door frames, used with fire doors swinging singly or in pairs.

MAXIMUM DOOR OPENING

Singles: 4'0" x 10'0" (1219 x 3048 mm)

Pairs: 8'0" x 10'0" (2438 x 3048 mm)

Contra-Swing: 4'0" x 8'0" (1219 x 2438 mm)

(NOTE: Contra-Swing frames limited to 1-1/2 Hour fire protection rating.)

MAXIMUM LEAF SIZE

Singles and Pairs: 4'0" x 10'0" (1219 x 3048 mm)

Contra-Swing: 4'0" x 8'0" (1219 x 2438 mm)

MULLIONS

Mullions are optional and may be welded or removable, for either between or behind the door applications. Doors shall not be hinged off removable mullions.

ANCHORS

Anchors are available for new or existing masonry, poured concrete, structural steel, wood and steel stud partitions.

SPECIFICATIONS

Frames shall be fabricated from hot rolled, cold rolled, galvanized, galvanized or stainless steel. Refer to "Profiles for Fire Rated Frame Products."

PROFILES

Single or double rabbet jambs, heads and mullions.



150 Division Drive
Wilmington, NC 28401
www.CustomMetalProductsNC.com

Revised 041907

Phone: 866-893-3338
Fax: 866-963-1355
Info@CustomMetalProducts.bz