



WINDOW FRAMES – GLAZED OR PANELED

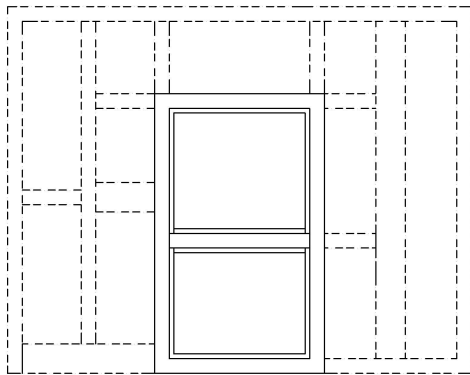

Floor Mounted Fire Window

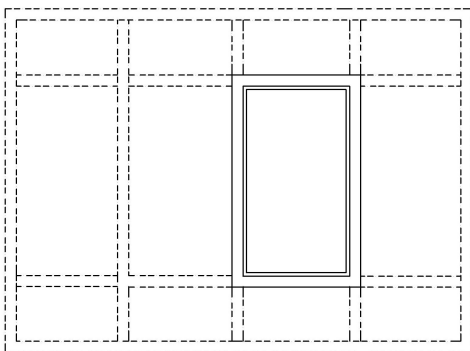

Knee Wall Mounted Fire Window

PRODUCT

Fire window frames with fixed openings and labeled glazing materials or panels. Windows with labeled wired glazing provide up to a 3/4 hour fire protection rating. With some labeled laminated and non-wired glazing materials, windows are available up to 1-1/2 hour fire protection rating. Refer to glazing manufacturers' listings for additional information. Fire windows may be mounted directly on the floor or on knee wall partitions.

MAXIMUM OVER-ALL UNIT SIZE

Drywall Partitions: 12'10" x 11'4" (3912 x 3454 mm)
All Other Partitions: 13'6" x 12'0" (4115 x 3658 mm)

MAXIMUM INDIVIDUAL LIGHT SIZE

Refer to "Representative Types of Fire Door Frame Product."

GLAZING

MAXIMUM INDIVIDUAL LIGHT SIZE

Refer to "Representative Types of Fire Door Frame Product."

PANEL MATERIAL

Minimum 0.032" (90.8 mm) thick hot rolled, cold rolled, galvanized, galvanized or Type 430 stainless steel laminated to each face of an approved core.

ANCHORS


Anchors are available for new or existing masonry, poured concrete, structural steel, wood and steel stud partitions.

SPECIFICATIONS

Window frames shall be fabricated from hot rolled, cold rolled, galvanized, galvanized or stainless steel. Refer to "Profiles for Fire Rated Frame Products."


PROFILES

Single or double rabbet jambs, heads, mullions and sills. Mullions and sills may be recessed from perimeter members.

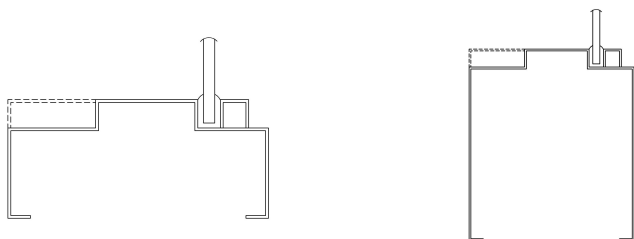

Jamb or Head

Sill

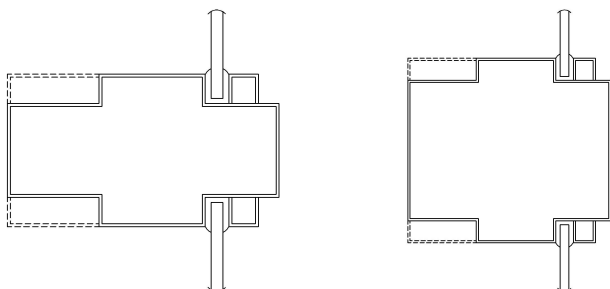

Mullions



150 Division Drive
Wilmington, NC 28401
www.CustomMetalProductsNC.com
Revised 032007

Phone: 866-893-3338
Fax: 866-963-1355
Info@CustomMetalProducts.biz