


“PH” SERIES DOOR

Polystyrene



- Polystyrene core
- “Hemmed” edge standard (skins mechanically interlocked with exposed seam)
- Both vertical edges beveled standard (optional square edge on one or both edges)
- 14 ga. top and bottom inverted channels standard (optional flush channels on one or both ends)
- 1-3/4” door thickness standard (optional 1-3/8” thickness)
- 18 ga. skins standard (optional 16 ga.)
- Cold Rolled Steel (CRS) standard (optional A60 Galvanealed , G60 and G90 Galvanized)
- Painted with rust inhibiting primer
- Standard reinforcements for hardware: 7 ga. hinge pads, 10 ga. lock tabs (with appropriate reinforced boxes) and 12 ga. closure reinforcements
- Approximate performance data:
 - U Factor = .146
 - R Factor = 6.87
 - Acoustical = STC 32
- Maximum UL rating is 1-1/2 Hour for 4'-0" x 8'-0" single door

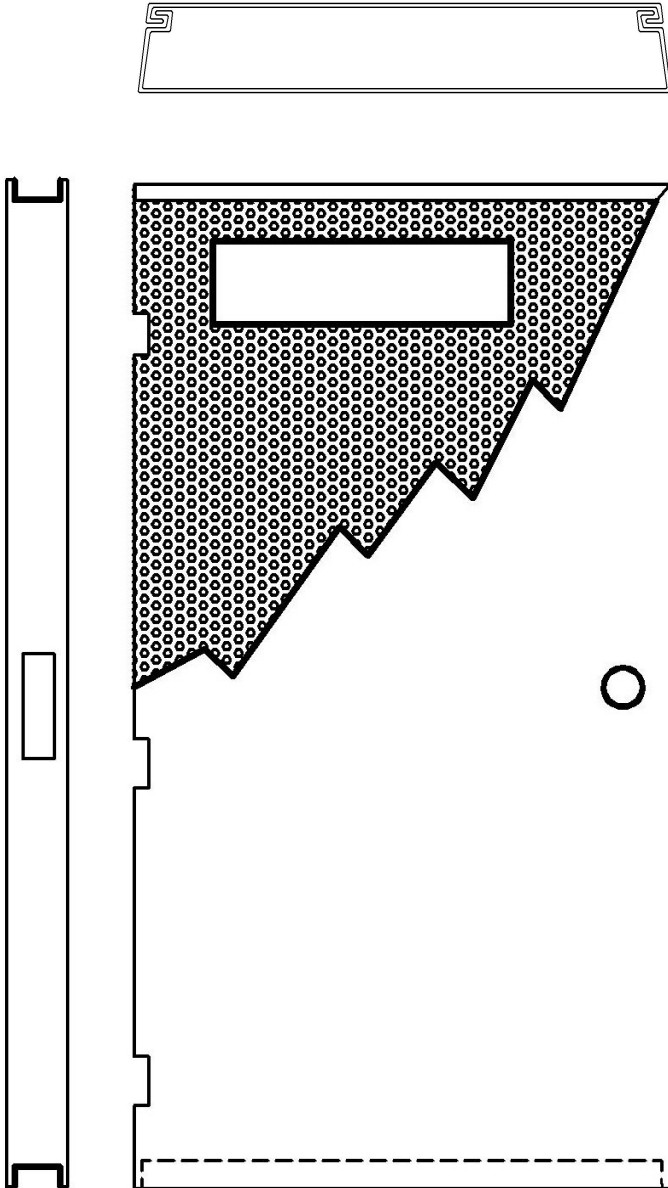

150 Division Drive
Wilmington, NC 28401
www.CustomMetalProductsNC.com
Revised 030110

Phone: 866-893-3338
Fax: 866-963-1355
Info@CustomMetalProducts.biz