


PB SERIES DOOR

Polystyrene



- Polystyrene core
- Butt edge with hairline exposed seam centered in vertical door edge. (optional tack welded and filled seams)
- Both vertical edges beveled (optional square edge on one or both edges)
- 16 ga. vertical edge channels standard (optional 14 ga. and 12 ga.)
- 16 ga. top and bottom inverted channels standard (optional 14 ga. and 12 ga.) (optional flush channels on one or both ends)
- 1-3/4" door thickness (optional 1-3/8" thickness, if not UL rated)
- 16 ga. skins standard (optional 14 ga. and 12 ga.)
- Cold Rolled Steel (CRS) (optional A60 Galvanealed)
- Painted with rust inhibiting primer
- Standard reinforcements for hardware: 7 ga. hinge pads, 10 ga. lock tabs (with appropriate reinforced boxes) and 12 ga. closure reinforcements
- Approximate performance data:
 - U Factor = .146
 - R Factor = 6.87
 - Acoustical = STC 32
- Maximum UL rating is 1-1/2 hour for 4'-0" x 8'-0" single door 8'-0" x 8'-0" pair

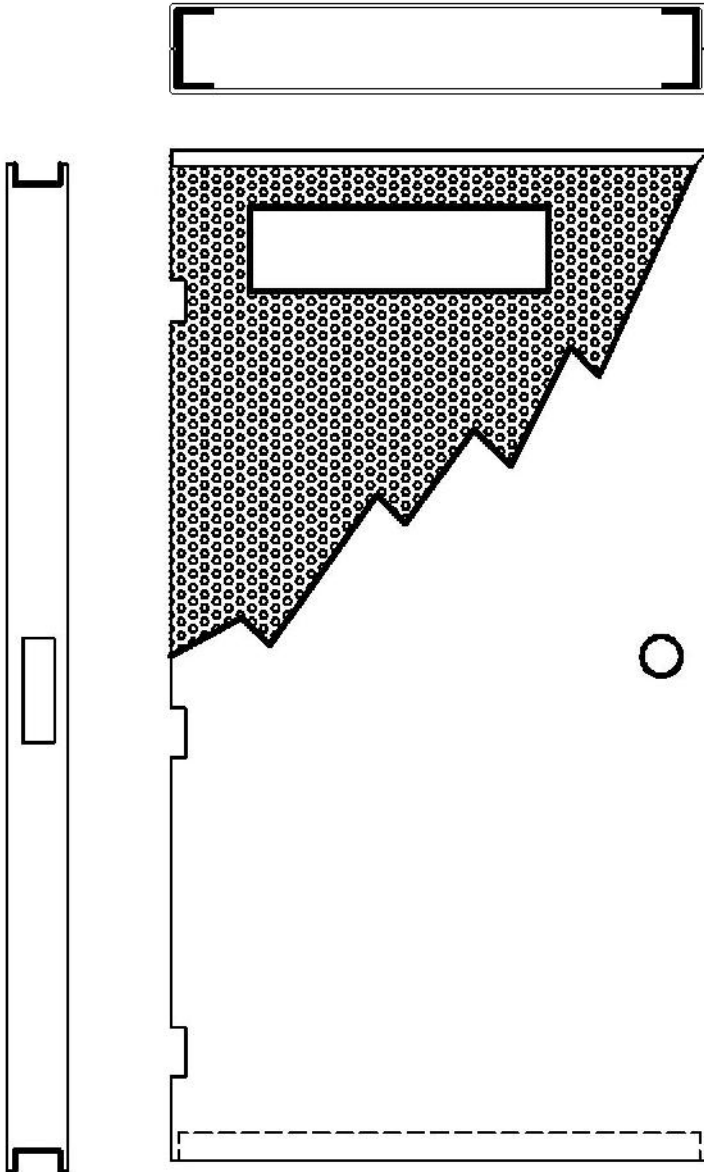

150 Division Drive
Wilmington, NC 28401
www.CustomMetalProductsNC.com
Revised 041012

Phone: 866-893-3338
Fax: 866-963-1355
Info@CustomMetalProducts.bz