



PROFILES FOR FIRE RATED FRAME PRODUCTS

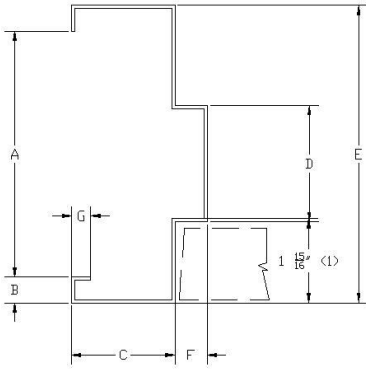


Double Rabbet Jamb, Heads and Sills

	A Throat	B Return	C Face	D Soffit	E Jamb Depth	F Stop	G Drywall Return
Min	2-1/4" ⁽³⁾ 57.1mm ^Ø	0	1" ⁽²⁾ 25.4 mm	3/16" 4.8 mm	2-3/8" 60.3 mm	5/8" 159mm	1/4" 6.4 mm
Max	13" 330.2 mm	3/4" 19.1 mm	12" 304.8mm	-	14-1/2" 368.3mm	-	3/4" 19.1 mm

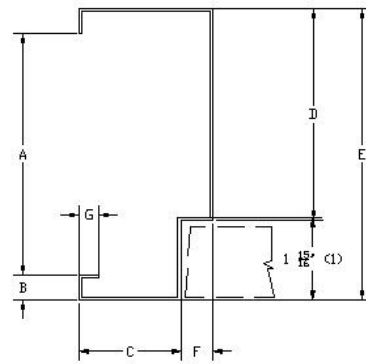

Single Rabbet Jamb, Heads and Sills

	A Throat	B Return	C Face	D Soffit	E Jamb Depth	F Stop	G Drywall Return
Min	2" ⁽³⁾ 50.8mm ^Ø	0	1" ⁽²⁾ 25.4 mm	3/16" 4.8 mm	2-1/8" 60 mm	5/8" 159mm	1/4" 6.4 mm
Max	13" 330.2 mm	3/4" 19.1 mm	12" 304.8mm	-	14-1/2" 368.3mm	-	3/4" 19.1 mm

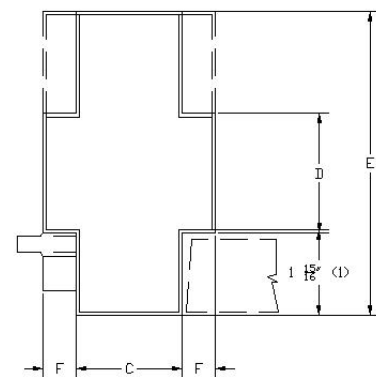

Single or Double Rabbet Mullions

	C Face	D Soffit	E Jamb Depth	F Stop
Min	0	1" ⁽²⁾ 25.4 mm	4-1/2" 114.3 mm	5/8" 15.9 mm
Max	12" 304.8 mm	-	10-1/2" 266.7 mm	-

- (1) To suit 1-3/4" (44 mm) doors
- (2) For 3 sided frames in masonry or concrete partitions and surrounding glazed openings in side light or window frames. 1-1/4" (31.8 mm) minimum at all frames in stud walls, all transom frames and surrounding door openings in side light frames.
- (3) Larger dimensions may be required to suit specific wall types.



150 Division Drive
Wilmington, NC 28401
www.CustomMetalProductsNC.com
Revised 051607

Phone: 866-893-3338
Fax: 866-963-1355
Info@CustomMetalProducts.bz