


# PH SERIES DOOR

## Polystyrene



- Polystyrene core
- “Hemmed” edge standard (skins mechanically interlocked with exposed seam)
- Both vertical edges beveled standard (optional square edge on one or both edges)
- 16 ga. top and bottom inverted channels standard (optional flush channels on one or both ends)
- 1-3/4” door thickness standard
- 18 ga. skins standard (optional 16 ga.)
- Cold Rolled Steel (CRS) standard (optional A60 Galvanealed.)
- Painted with rust inhibiting primer
- Standard reinforcements for hardware: 7 ga. hinge pads, 10 ga. lock tabs (with appropriate reinforced boxes) and 12 ga. closure reinforcements
- Approximate performance data:
  - U Factor = .146
  - R Factor = 6.87
  - Acoustical = STC 32
- Maximum UL rating is 1-1/2 Hour for 4’-0” x 8’-0” single door 8’-0” x 8’-0” pair

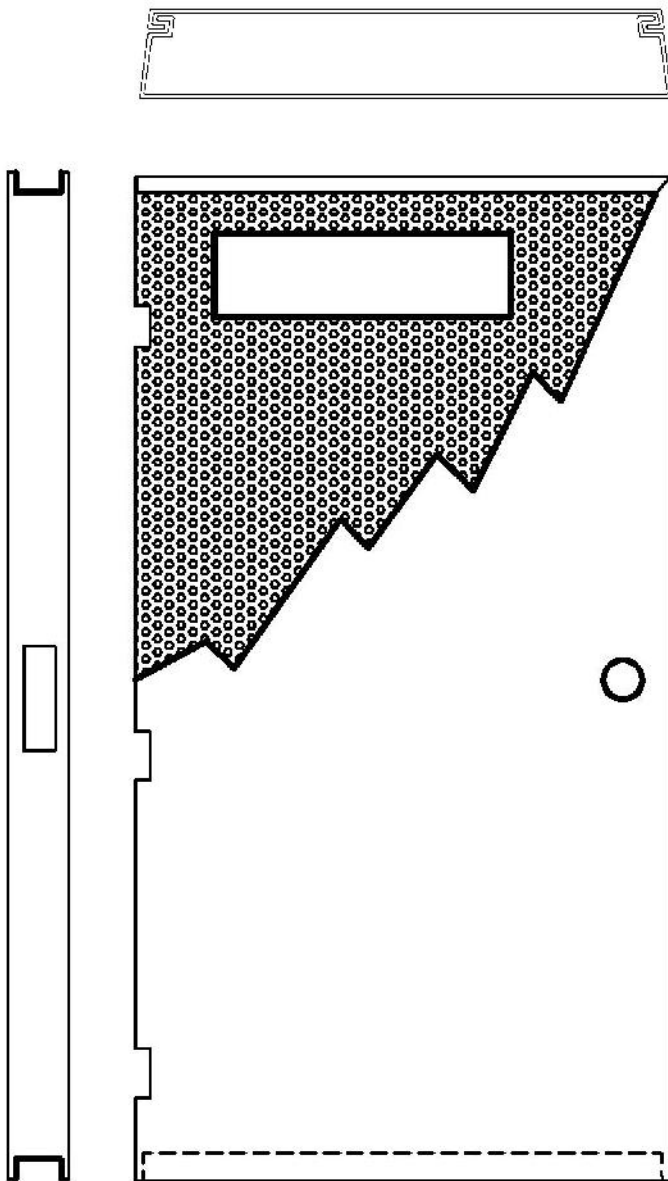

150 Division Drive  
Wilmington, NC 28401  
[www.CustomMetalProductsNC.com](http://www.CustomMetalProductsNC.com)  
Revised 032912

Phone: 866-893-3338  
Fax: 866-963-1355  
[Info@CustomMetalProducts.biz](mailto:Info@CustomMetalProducts.biz)