




DOUBLE EGRESS HOLLOW METAL DOORS AND FRAMES

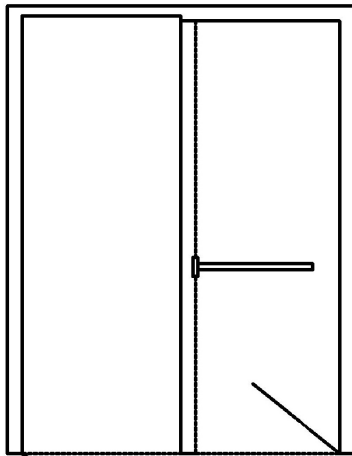


Typical Elevations

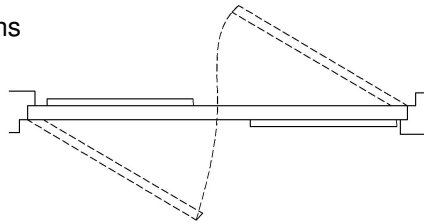


Typical Plan View



Typical Head

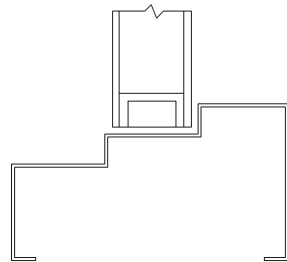

Alternate Head

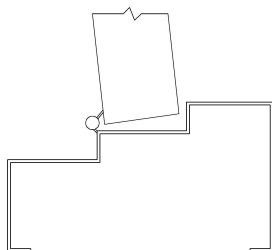

Typical Jamb

PRODUCT

1-3/4" (44 mm) thick pairs of doors swinging in opposite directions, in ratings up to 3 Hour fire protection.

Double egress assemblies permit traffic flow in both directions through the same opening. Where double egress doors are used for 1-1/2 Hour applications or less, they may be installed without astragals. For 3 Hour rated double egress doors, an over-lapping astragal is required.

MAXIMUM DOOR OPENING

8'0" x 10'0" (2438 x 3048 mm)

MAXIMUM LEAF SIZE

4'0" x 10'0" (1219 x 3048 mm)

HARDWARE

Hinges:

Offset Pivots:

Locks, Latches, Deadbolts: Not Permitted

Fire Exit Hardware:

Overhead Closers:

Floor Closers:

Flush Bolts: Not Permitted

ANCHORS

Anchors are available for new or existing masonry, poured concrete and wood or steel stud partitions.

FRAMES

A fire rated frame listed for use with double egress doors is required.

SPECIFICATIONS

Frames shall be fabricated from hot rolled, cold rolled, galvanized, galvanealed or stainless steel. Refer to "Profiles for Fire Rated Frame Products."



150 Division Drive
Wilmington, NC 28401
www.CustomMetalProductsNC.com

Revised 041907

Phone: 866-893-3338
Fax: 866-963-1355
Info@CustomMetalProducts.bz